

**Answer-key & Solution**

**SSC JE (Electrical)**  
**MOCK -(76)**  
**Date 10/12/2016**


1. B	26. A	51. B	76. C	101. A	126. B	151. C	176. D
2. C	27. A	52. C	77. D	102. D	127. C	152. B	177. C
3. B	28. D	53. A	78. A	103. B	128. D	153. B	178. C
4. A	29. C	54. C	79. A	104. D	129. D	154. B	179. B
5. C	30. A	55. A	80. A	105. A	130. A	155. C	180. A
6. B	31. D	56. C	81. A	106. C	131. B	156. B	181. C
7. C	32. A	57. B	82. C	107. C	132. D	157. B	182. B
8. D	33. C	58. A	83. B	108. D	133. A	158. C	183. A
9. C	34. A	59. B	84. C	109. C	134. A	159. D	184. B
10. B	35. C	60. C	85. D	110. D	135. A	160. D	185. D
11. C	36. D	61. B	86. C	111. A	136. C	161. C	186. D
12. B	37. D	62. D	87. A	112. A	137. C	162. B	187. B
13. D	38. C	63. C	88. B	113. A	138. C	163. A	188. B
14. A	39. A	64. B	89. D	114. D	139. C	164. B	189. D
15. A	40. D	65. B	90. B	115. B	140. B	165. A	190. A
16. A	41. C	66. D	91. C	116. D	141. A	166. B	191. A
17. D	42. C	67. C	92. C	117. B	142. D	167. C	192. D
18. B	43. B	68. A	93. C	118. B	143. D	168. A	193. A
19. C	44. A	69. A	94. B	119. A	144. B	169. C	194. C
20. B	45. A	70. B	95. B	120. C	145. A	170. D	195. C
21. D	46. B	71. C	96. C	121. B	146. C	171. C	196. C
22. C	47. D	72. A	97. B	122. A	147. B	172. B	197. C
23. D	48. A	73. B	98. B	123. C	148. D	173. C	198. A
24. D	49. C	74. B	99. B	124. B	149. A	174. D	199. A
25. C	50. A	75. D	100. A	125. D	150. D	175. C	200. A

**Note :** If your opinion differ regarding any answer, please message the mock test and Question number to 9560620353  


---

**Note :** If you face any problem regarding result or marks scored, please contact : 9313111777

**SOLUTION SSC JE (Electrical) MOCK TEST no. 76**

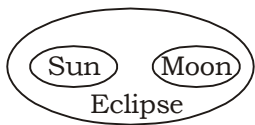1. (B) TAP  $\xrightarrow{\text{opposite}}$  PAT  
DAM  $\xrightarrow{\text{opposite}}$  **MAD**
2. (C) In Library, we find books similarly, in banks we find money.
3. (B)  $\begin{matrix} \text{ABC} & & \text{HIJ} \\ \downarrow & +7 & \downarrow \\ \text{OPQ} & & \text{VWX} \end{matrix}$
4. (A)  $8 + 1 = 9 \Rightarrow 9^2 = 81 \xrightarrow{\text{opposite}} 18$   
 $24 + 1 = 25 \Rightarrow 25^2 = 625$   
 $\xrightarrow{\text{opposite}} 526$
5. (C) A  $\xrightarrow{+2}$  C  $\xrightarrow{+2}$  E  
R  $\xrightarrow{+2}$  T  $\xrightarrow{+2}$  V  
B  $\xrightarrow{+2}$  D  $\xrightarrow{+2}$  F  
F  $\xrightarrow{+2}$  H  $\xrightarrow{+2}$  J
6. (B) Option (B) comprises only vowels whereas only consonants are present in rest of the options.
7. (C) After observing each options we have,  
(a)  $(24 \times 2) - 2 = 46$   
(b)  $(32 \times 2) - 2 = 62$   
**(c)  $(30 \times 2) - 4 = 56$**   
(d)  $(38 \times 2) - 2 = 74$   
so, option (C) is different.
8. (D) (a) E  $\xrightarrow{-3}$  B  $\xrightarrow{+2}$  D  
(b) I  $\xrightarrow{-3}$  F  $\xrightarrow{+2}$  H  
(c) U  $\xrightarrow{-3}$  R  $\xrightarrow{+2}$  T  
**(d) Y  $\xrightarrow{-2}$  W  $\xrightarrow{+1}$  X**
9. (C) Except 481, rest are perfect squares of a number.
10. (B) 'Sun is a source of light'. This statement doesn't mean that moon is not a source of light and also doesn't mean that light has only one source. So, neither conclusion I nor II follows.
11. (C)  $3 \times 5 \times 7 \Rightarrow 3 + 5 + 7 = 15$   
 $2 \times 4 \times 6 \Rightarrow 2 + 4 + 6 = 12$   
 $4 \times 7 \times 9 \Rightarrow 4 + 7 + 9 = 20$
12. (B) 
13. (D)  $(4 + 2)^2 = 36$   
 $(3 + 7)^2 = 100$


- $(2 + 5)^2 = 49$
14. (A)  $\sqrt{16} + \sqrt{25} = 9$   
 $\sqrt{49} + \sqrt{36} = 13$   
 $\sqrt{64} + \sqrt{81} = 17$
15. (A) Out of 12 questions, 6 questions have one option  
so, Total no. of questions =  $6 + (6 \times 2) = 18$   
As, Each questions has 4 sections  
so, Total number of question (including different sections)  
 $= 18 \times 4 = 72$
16. (A) Lucknow  $\rightarrow$  Uttar Pradesh  $\rightarrow$  India  $\rightarrow$  Asia  
1 2 3  
5  
 $\rightarrow$  World  
4
17. (D) Hari > Chaman > Satish  
Vijay > Mukesh > Chaman > Satish.  
Hence, we can say that Satish is the smallest among all.
18. (B)  $\begin{matrix} & \times 10+3 & & \times 10+3 & & \times 10+3 \\ & \downarrow & & \downarrow & & \downarrow \\ 13, 10, & \mathbf{103}, & 100, & 1003, & 1000, & 10003 \\ \uparrow & \uparrow & \uparrow & \uparrow & \uparrow & \uparrow \\ & -3 & & -3 & & -3 \end{matrix}$
19. (C)  $\begin{matrix} & & -4 & & & \\ & & \downarrow & & \downarrow & \\ & & -4 & & & \\ & & \downarrow & & \downarrow & \\ \text{NP} & \text{MK} & \text{RT} & \text{IG} & \text{VX} \\ \uparrow & \uparrow & \uparrow & \uparrow & \uparrow \\ \uparrow & \uparrow & \uparrow & \uparrow & \uparrow \\ & +4 & & +4 & \\ & \uparrow & & \uparrow & \\ & +4 & & +4 & \end{matrix}$
20. (B) The letter 'R' of Doctor is missing in word DECOMPOSITION.
21. (D)
22. (C) 225 336 447 **558** 669  
 $\begin{matrix} \uparrow & \uparrow & \uparrow & \uparrow \\ +111 & +111 & +111 & +111 \end{matrix}$
23. (D) From option (D) we have,  
 $5 > 8 + 4 = 10 < 4 \times 8$   
 $\Rightarrow 5 \times 8 \div 4 < 10 - 4 + 8$   
 $= 5 \times 2 < 18 - 4 = 10 < 14$
24. (D)
25. (C) C  $\Rightarrow$  **44, 53**  
A  $\Rightarrow$  42, 62, **62**  
L  $\Rightarrow$  36, **65**  
M  $\Rightarrow$  **51**  
CALM  $\Rightarrow$  44, 62, 65, 51
26. (A) Father is responsible for the existence

of a child similarly, **writer** is responsible for the existence of a book.


27. (A)  $(2)^3 = 8 : (3)^2 = 9$

$(4)^3 = 64 : (5)^2 = 25$

28. (D) As,



Similarly,



29. (C)  $(6 \times 6) - 1 = 35$

$(9 \times 6) - 1 = 53$

30. (A) 216 is a cube of even number whereas rest are cubes of odd number.

Example-  $27 = (3)^3$ ,  $125 = (5)^3$ ,  **$216 = (6)^3$** ,  $343 = (7)^3$

31. (D) Sum of 1<sup>st</sup> three numbers results in the fourth whereas option (d) is not satisfying the same.

32. (A) We know that Red, Green and Blue are primary colours where as Yellow is not a primary colour.

33. (C) Except option (C), In other options each letters are increased by 1.

34. (A) Unit → Tens → Hundereds → Thousands  
           2          4          1          3  
           → Lakhs  
           5

35. (C) The letter 'R' of Pointer is missing in word DISAPPOINTMENT.



36. (D)  $2486 - 85 = 2401$  is a perfect square of 49.

37. (D)  $55 + 66$


$\Rightarrow 5 + 5 + 6 + 6 = 22 \Rightarrow 22 \times \frac{3}{2} = 33$   
 $22 + 99$

$\Rightarrow 2 + 2 + 9 + 9 = 22 \Rightarrow 22 \times \frac{3}{2} = 33$   
 $44 + 88$

$\Rightarrow 4 + 4 + 8 + 8 = 24 \Rightarrow 24 \times \frac{3}{2} = 36$

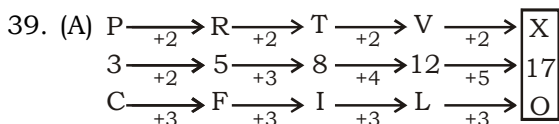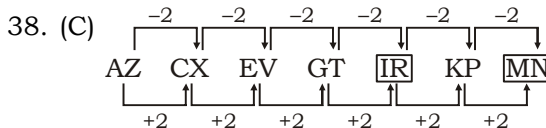

40. (D)




41. (C) As Ramesh and Amit are brothers. Also, Amit is the son of Sushma. So, Ramesh is also the son of Sushma.

42. (C)  $24 * 2 * 4 * 3$


$\Rightarrow 24 \div 2 = 4 \times 3$

$\Rightarrow 12 = 12$


43. (B)



44. (A) As,

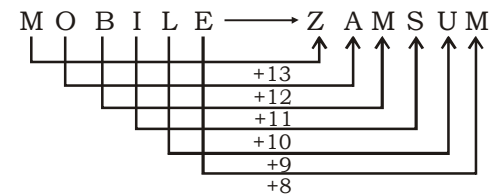

Similarly,

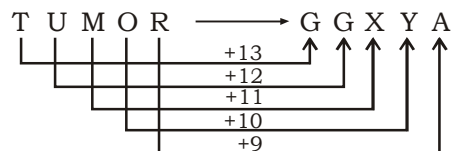

45. (A)

46. (B) a b b b / a b b b / a b b b

47. (D)  $(3)^2 + (5)^2 + (1)^2 = 35$

$(4)^2 + (7)^2 + (2)^2 = 69$

$(6)^2 + (3)^2 + (7)^2 = 94$

48. (A)

49. (C)


50. (A)

55. (A) The Indian Councils Act 1909, commonly known as parliament of the United Kingdom that brought about a limited increase in the involvement of Indians in the governance of British India.

56. (C) The Public Accounts Committee (PAC) is a committee of selected members of Parliament, constituted by the Parliament of India for the auditing of the expenditure of the government of India. Its chief function is to examine the audit


- |   |  |
|---|--|
| <p>report of Comptroller and Auditor General (CAG) after which it is laid in the Parliament CAG to assist the committee during the course in investigation. None of the 22 members shall be a minister in the government.</p> <p>59.(B) The Constitution of India mentions certain conditions for a person to be eligible for being a judge of the Supreme court of India. In order to be appointed as a Judge of the Supreme Court, a person must be a citizen of India and must have been for at least five years, a Judge of a High Court or of two or more such Courts in succession, or an advocate of a high Court or of two or more such Courts in succession for at least 10 years or he must be a distinguished jurist in the opinion of the President.</p> <p>61.(B) Mushroom cultivation has been found to coincide with decrease of incidents of breast cancer. Spent residues after cultivation could be a better source of biologically pre-treated substrates for biogas production and agricultural waste recycling can be can be achieved through controlled cultivation of mushrooms.</p> <p>62.(D) The freezing point of water is the temperature at which water changes phase from a liquid to a solid. Under normal conditions, ordinary water freezes at 0° C or 32° F. The temperature may be lower if super cooling occurs or if there are impurities present in the water which could cause freezing point depression to occur.</p> <p>64.(B) The Indian Tri-colour was first unfurled on 26 January, 1930 at Lahore, by Pandit Jawaharlal Nehru. It was on the same day that the Indian National Congress declared 26<sup>th</sup> January as Independence Day or as the day for Poorna Swaraj (Complete Independence) which occurred 20 years later.</p> <p>66.(D) An artificial ecosystem is one that is created by people. You can create an artificial ecosystem in an aquarium or terrarium. Nathaniel Bagshaw Ward is credited as the inventor of the terrarium, which he accidentally created in 1829.</p> <p>68.(A) Ozone layer serves as a protective shield against harmful solar ultraviolet radiation.</p> <p>69.(A) Higher concentration of Nitrogen and Phosphorus causes Eutrophication.</p> <p>72.(A) Dyarchy was introduced as a constitutional reform by Edwin Samuel Montagu</p> | <p>(secretary of state for India, 1917-22) and Lord Chelmsford (Viceroy of India, 1916-21). It marked the first introduction of the democratic principle into the executive branch of the British administration of India. Though much criticized, it signified a breakthrough in British Indian government and was the forerunner of India's full provincial autonomy (1935) and independence (1947).</p> <p>73.(B) United States is the third largest country in terms of population after China and India.</p> <p>75.(D) Water vapour transpires constantly through pores (stomata) in the surface of plant's leaves.</p> <p>76.(C) Vijay Stambh is an imposing structure located in Chittorgarh fort in Rajasthan which was constructed by Mewar king Rana Kumbha in 1442 AD to commemorate his victory over the combine armies of Malwa and Gujarat led by Mahmud Khilji.</p> <p>78.(A) According to the Special Theory of Relativity, the mass of a moving object measures more as its velocity increases until, at the speed of light, it becomes infinite. This is because as an object gains speed, it gains more (kinetic) energy.</p> <p>80.(A) The sewage obtained from water closets and urinals in known Sanitary waste.</p> <p>82.(C) The main source of carbon monoxide is transportation.</p> <p>84.(C) Composite volcanoes are most commonly found in island arcs. Most of them are found scattered on the islands adjoining the Pacific Ring of Fire where about 75% of Earth's volcanoes are found. It is a region of high volcanic and seismic activity that surrounds the majority of the Pacific Ocean Basin.</p> <p>88.(B) Marginal product of an input (factor of production) is the extra output that can be produced by using one more unit of the input (for instance, the difference in output when a firm's labour usage is increased from five to six units), assuming that the quantities of no other inputs to production change. Marginal product, which occasionally goes by the alias marginal physical product (MPP) is the one of the two measures derived from the total product. The other is average product. Marginal product is directly proportional to total product.</p> |
|---|--|

- 89.(D) Work done by the string of the simple pendulum during one complete oscillation is zero. Tension in the string exactly cancels the component parallel to the string. This leaves a net restoring force back toward the equilibrium position as it is equal to zero.
- 90.(B) Gene is a segment of DNA in all living organisms.
- 94.(B) India is called a mixed economy because there is both private owned enterprises and state owned enterprises and the government does not intervene on the decisions of enterprises owned by individuals except to govern law and to correct market failures. The product market in this case is determined by the market demand and market supply rather than the decisions of the policy makers.
- 97.(B) If the President is satisfied on the basis of the report of the Governor of the concerned state or from other sources that the governance in a state cannot be carried out according to the provisions in the Constitution, he/she can declare a state of emergency in the state. Such a emergency must be approved by the Parliament within a period of 2 months. Under Article 356 of the Indian Constitution, it can be imposed from six months to a maximum period of three years with repeated parliamentary approval after every six months.
- 99.(B) A strait is a narrow, typically navigable channel of water that connects two larger, navigable bodies of water. It commonly refers to a channel of water that lies between two land masses, but it may also refer to a navigable channel through a body of water that is otherwise not navigable, for example because it is too shallow, or because it contains an un-navigable reef or archipelago.
101. (A) No-load losses (essentially core losses not F & W losses) are low and depend upon the applied voltage in an induction machine.
102. (D) Air core means non iron core so there will be no hysteresis losses.
104. (D) Core losses are constant as  $V_t$  and  $f$  are treated as constant.
105. (A) Equivalent circuit for double cage rotor motor.

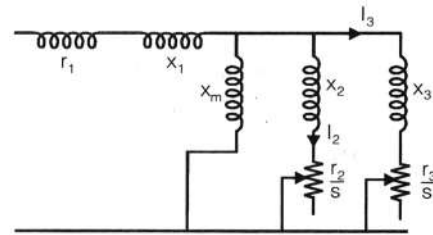

107. (C) Due to high starting torque.
109. (C) Centrifugal switch can be used to disconnect either starting winding or starting capacitor. But mostly it is used to disconnect starting winding.

124. (B)

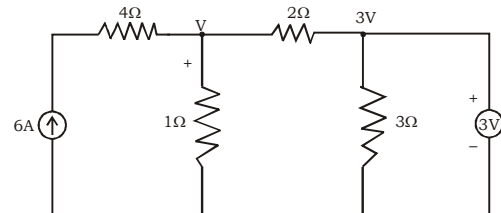

Nodal at V  $\Rightarrow$

$$\frac{V}{1} + \frac{V-3}{2} = 6$$

$$2V + V - 3 = 12$$

$$3V = 15$$

$$V = 5$$

$\therefore$  Voltage across the  $2\Omega$  resistor in  $5 - 3 = 2\text{ V}$

128. (D)  $Z_{pu(new)} = Z_{pu(old)} \times \frac{MVA_{new}}{MVA_{old}} \times \left(\frac{V_{old}}{V_{new}}\right)^2$

$$= 5 \times 100 \times \left(\frac{22}{220}\right)^2 = 0.1 pu$$

138. (C) Load factor  $\rightarrow$  load factor is the average power divided by the peak power over a period of time.


$\rightarrow$  Load factor is a measure of the output of a power plant compared to the maximum output it could produce.

139. (C) Diversity factor : Defined as the sum of individual maximum demands on the consumers, divided by the maximum load on the system.

$\rightarrow$  If all the demands came at the same time, i.e. unity diversity factor, the total installed capacity required would be much more. Luckily, the factor is much

higher than unity, especially for domestic loads.

143. (D) To represent Transformer in zero sequence n/w

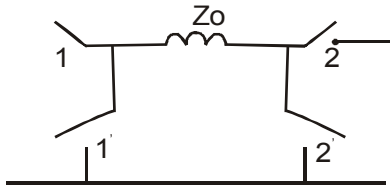

Switching diagram

1' & 2' → Series Switching

1 & 2' → Shunt Switching

1 & 1' → Primary Switching

2 & 2' → Secondary Switching

→ Series switches is used, when the winding is star connected neutral grounded.

→ A shunt switches is closed, when the winding is D-connected.

151. (C) Magnetic coupling between two windings depends upon flux linkage between them. Flux linkage can be maximized between two coils by placing magnetic core of low reluctance in between them.

152. (B) The per unit value of any parameter of a transformer remain same irrespective of whether it is referred to primary or secondary.

154. (B) In case of a lap wound dc motor the number of parallel paths is equal to the number of poles, irrespective of all other parameters.

155. (C) Given  $E = 230$  volt.  $E_b = 210$  volt. The voltage equation of a dc motor is given by  $E = E_b + I_a R_a$

$$\therefore I_a = (E - E_b) / r_a$$

$$\text{Or } I_a = (230 - 210) / 0.6$$

$$= 33.3 \text{ Amp.}$$

156. (B) When alternating voltage is applied across the single winding single phase motor, there will be a double revolving magnetic field which creates a pulsating magnetic field. Due to this pulsating magnetic field there will be no resultant torque in any direction of rotation hence net starting torque of this type of motor is zero.

162. (B) Charge of an  $e^- = - 1.6 \times 10^{-19}$  coulomb

Total negative charge passes across section of Conductor  $= 5 \times 10^{16} \times 1.6 \times 10^{-19}$

$$= 8 \times 10^{-3}$$


Charge passes in one second

$$= \frac{8 \times 10^{-3} \text{ C}}{80 \text{ sec.}}$$

$$= 0.1 \text{ mA} \left( \frac{\text{Coulomb.}}{\text{sec}} \right)$$

163. (A)  $I = 1 \times \frac{1}{1 + (2+1)} = 0.25 \text{ A}$

165. (A)

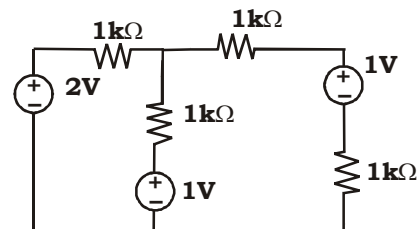

$$\frac{2 - V}{1} = \frac{V - 1}{1} + \frac{V - 1}{2}$$

$$2 - V = \frac{2V - 2 + V - 1}{2}$$

$$4 - 2V = 3V - 3$$

$$V = \frac{7}{5} \text{ Volt}$$

Current in resistor R

$$= V - \frac{1}{2} = \frac{7}{5} - \frac{1}{2} = \frac{7 - 5}{2}$$

$$= \frac{2}{10} \Rightarrow 0.2 \text{ A}$$

166. (B) Normally metallic substance has positive temperature coefficient. Gold is a metallic substance.

167. (C) The expression of capacitive

$$\text{impedance is } \frac{V_c}{I_c} = Z_c = \frac{1}{2\pi f C}$$

Here,  $V_c = 20 \text{ V}$ ,  $I_c = 12.6 \text{ mA}$  and  $f = 1000 \text{ Hz}$ .

$$\Rightarrow C = \frac{12.6 \times 10^{-3}}{20 \times 2\pi \times 1000} = \frac{12.6 \times 10^{-3}}{126 \times 10^3} = 0.1 \mu F.$$


169. (C)  $\therefore$  Ideal voltage has zero internal resistance,

$$\therefore \text{Time constant } \tau = RC = 0$$

Hence capacitor will charge instantaneously.

170. (D) Time constant,  $t = R_{net} \cdot C$

$R_{net}$  = Net resistance across capacitor when all the independent voltage sources are short circuited and all independent current sources are open circuited.

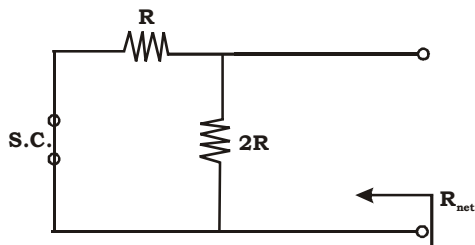

$$R_{net} = R \parallel 2R = \frac{2}{3} R$$

Hence time constant,

$$\tau = \frac{2}{3} RC \text{ sec.}$$

173. (C) Luminous efficiency is defined as the output in lumens per watt of the power consumed by the source of the light. For fluorescence lamp luminous efficiency is 40 lumens/watt.

177. (C) In general Torque  $\propto \phi_1 \cdot \phi_2$  so by changing the direction of any of the two fluxes the direction of rotation of a dc series

motor can be reversed.

178. (C)  $V = 0.08 \times 1 \text{ pu}$

$$V_{\text{actual}} = 0.08 \times 2000 = 160 \text{ V}$$

179. (B) Core-loss component =  $5000/220 = 22.73 \text{ A}$

182. (B)  $N\phi = Li \Rightarrow L = 1H$

$$\Rightarrow W_E = \frac{1}{2} Li^2 = \frac{1}{2} J$$

183. (A) Capacity factor

$$= \frac{\text{Maxima load}}{\text{Plant Capacity}} \times \text{Load factor}$$

$$\Rightarrow 0.6 = \frac{1000}{\text{Plant capacity}} \times 0.75$$

$$\Rightarrow \text{Plant Capacity} = 1250 \text{ MW}$$

$$\text{Reserve capacity} = \text{Plant Capacity}$$

$$- \text{Maximum demand}$$

$$= 1250 - 1000 = 250 \text{ MW}$$

184. (B) the high speed circuit breakers improves the system stability. Ex. Air blast circuit breaker.

185. (D) Corona, is helpful in one respect, namely, it reduces the effect of surges and acts as a relief valve for them. This is so because the surges are partially dissipated as corona.

188. (B) Power = 100 W

$$\text{Time} = 10 \times 7 \text{ hrs.} = 70 \text{ hrs.}$$

$$\text{Energy consumption} = 100 \times 70 \text{ W-hrs}$$

$$= 7000 \text{ W-hrs} = 7 \text{ KW-hrs}$$

$$= 7 \text{ Units [ 1 KW-hr = 1 Unit].}$$

194. (C) Given  $E = 230 \text{ volt}$ ,  $E_b = 210 \text{ volt}$ . The voltage equation of a dc motor is given by  $E = E_b + I_a R_a$

$$\therefore I_a = (E - E_b) / r_a$$

$$\text{Or } I_a = (230 - 210) / 0.6$$

$$= 33.3 \text{ Amp.}$$